

ICONIC LIGHTS

MICRO-AFX-RTL

Shallow recessed encased source trimless downlight

LIGHT SOURCE



POWER 1 W



> 90



- ▶ 2700K
- ▶ 3000K
- ▶ 4000K



RGBW not available



OPTIC

Available optics



10-20°



20-35°





35-60°

Glass

Tempered transparent glass

FIXTURE

Body material	Aluminum 6082
Body finish	Black thickness oxidation
Frame material	Aluminum 6082
Frame finish	▶ Anodization ▶ Coating
IP Rate	IP67
Fixing system	O-Ring + Fixing ring

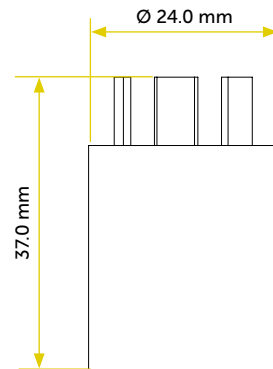

ELECTRICAL FEATURES

Driver	External
Dimmable	PWM (100 – 500Hz)
Voltage	18 - 32Vdc
Protections	▶ Reverse polarity ▶ 500V Spike ▶ Interference

MECHANICAL FEATURES

Dimensions	Ø 24.0 mm – Recess 37.0 mm
Weight	30 gr
Cut-out	24.0 mm * * Non-executive measures
Use	Outdoor and Indoor