
## COURTESY LIGHTS

## MINI-SUN

## ALTRALUCE

## Recessed courtesy and step light with inclined light beam

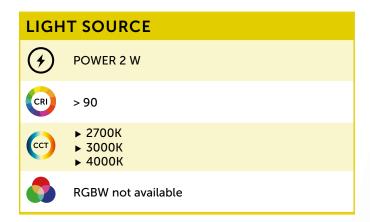

OPTIC				
Available optics	S 10-20°	M 20-35°	W 35-60°	>60°
Polycarbonate	Transp	parent		

FIXTURE	
Body material	Aluminum 6082
Body finish	Black thickness oxidation
Frame material	<ul><li>► AISI316L Stainless steel</li><li>► Aluminum 6082</li></ul>
Frame finish	<ul><li>▶ Polishing</li><li>▶ Anodization</li><li>▶ Coating</li></ul>
IP Rate	IP67
Fixing system	O-Ring + Bushing

ELECTRICAL FEATURES				
Driver	External			
Dimmable	PWM (100 – 500Hz)			
Voltage	18 - 32 Vdc			
Protections	<ul><li>▶ Reverse polarity</li><li>▶ 500V Spike</li><li>▶ Interference</li></ul>			

MECHANICAL FEATURES				
Dimensions	Ø 50.0 mm – Re	ecess 35.0 mm		
Weight	110 gr			
Cut-out	36.5 mm *	* Non-executive measures		
Use	Outdoor and In	Outdoor and Indoor		



