LINEAR LIGHTS

## PASO

Surface mounted step light in PCB and resin-coated strip led

LIGHT SOURCE		
	POWER 8 W/mt	
CRI	>80	
Сст	► 2700K ► 3000K ► 4000K	
	RGBW Not available	

OPTIC	
Available optics	>60°
Resin	Frosted

FIXTURE		
IP Rate	IP68	
Fixing system	Clips	


ELECTRICAL FEATURES				
Dimmable	PWM (100 – 500Hz)			
Voltage	24 stab. Vdc			
Protections	<ul> <li>Reverse polarity</li> <li>500V Spike</li> <li>Interference</li> </ul>			


MECHANICAL FEATURES		
Dimensions	Min. 100.0 mm - Max 2000.0 mm x 13.0. mm x H. 11.0 mm	
Weight	120 gr/mt	
Use	Outdoor and Indoor	



ALTRALUCE

LIGHT DIFFERENT

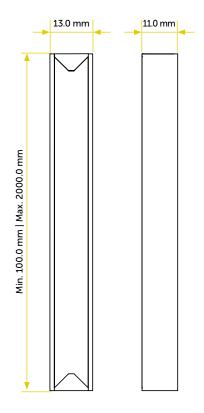



Altraluce reserves the right to change at any time and at its sole discretion each product or the respective technical specifications. Before entering the p/o it is recommended to check with your sales representative the information of the present technical sheet.