
## ICONIC LIGHTS

## S-OUT-C

## ALTRALUCE

## Surface mounted downlight

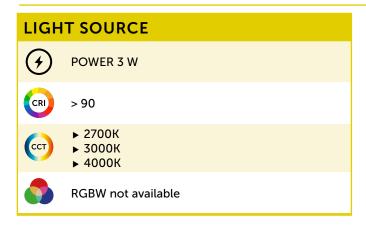

| OPTIC            |                               |
|------------------|-------------------------------|
| Available optics | s M W<br>10-20° 20-35° 35-60° |
| Glass            | Tempered transparent glass    |

| FIXTURE        |  |                     |
|----------------|--|---------------------|
| Body material  | Aluminum 6082  |                     |
| Body finish    | Black thickness oxid   | lation              |
| Frame material | <ul><li>► Aluminum 6082</li><li>► Brass</li></ul>                          |                     |
| Frame finish   | <ul><li>▶ Anodization</li><li>▶ Galvanization*</li><li>▶ Coating</li></ul> | *For interiors only |
| IP Rate        | IP67   |                     |
| Fixing system  | Screws   |                     |

| ELECTRICAL FEATURES |  |  |
|---------------------|--|--|
| Driver              | Integrated   |  |
| Dimmable            | PWM (100 – 500Hz)  |  |
| Voltage             | 18 - 32Vdc   |  |
| Protections         | <ul><li>Reverse polarity</li><li>500V Spike</li><li>Interference</li></ul> |  |

| MECHANICAL FEATURES |                    |  |
|---------------------|--------------------|--|
| Dimensions          | Ø 55.0 mm          |  |
| Weight              | 155 gr             |  |
| Use                 | Outdoor and Indoor |  |

Non-executive measures



