


STABILIZED

752580 - 81 - 82 - 83 - 84 - 85 - 86 - 87 - 88

- ▶ Self-regulated: consistent light and temperature even if feeded at more than 24V (nominal)
- ▶ Ideal for "on batteries" electric systems

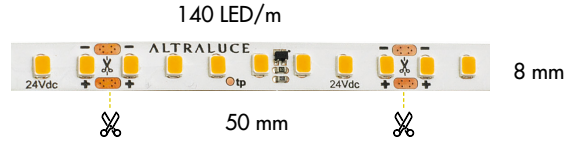

General Parameters

Product No.	Dimension	LED Qty	IP	LED type	CRI
752580	Size: 8 mm Total Length: 5 m Cut: 50 mm	140 LED/m	IP20	SAMSUNG® 2835	>90
752581					
752582					
752583					
752584					
752585					
752586					
752587					
752588					

Photoelectric Parameters

Product No.	Power	Feeding	Insulation Class	CCT	Lumen Flux
752580	10 W/m	18/32 V DC	III	2700 K	1145 lm/mt
752581	10 W/m			3000 K	1200 lm/mt
752582	10 W/m			4000 K	1280 lm/mt
752583	15 W/m			2700 K	1720 lm/mt
752584	15 W/m			3000 K	1800 lm/mt
752585	15 W/m			4000 K	1914 lm/mt
752586	20 W/m			2700 K	2240 lm/mt
752587	20 W/m			3000 K	2340 lm/mt
752588	20 W/m	4000 K	2490 lm/mt		